NOTES:

1. Tree barrocades are to be inspected and approved by the County prior to the commencement of any clearing or construction activities.

*2. Installation of a retaining wall shall be placed no nearer the tree trunk than 3 times the trunks diameter, than 3 times the trunks diameter, measured at 4.5 feet above the natural ground when no more than 30% of the trees root system will be severed.

3. Unless otherwise required by the Engineer, the contractor shall provide a tree wall at all locations where ground elevations will differ by 6 inches or more with proposed construction. The wall shall be a minimum of three feet from the outside edge of the tree and extend beyond the tree canopy by a factor of two (2) or until the ground elevations are 6" or less.

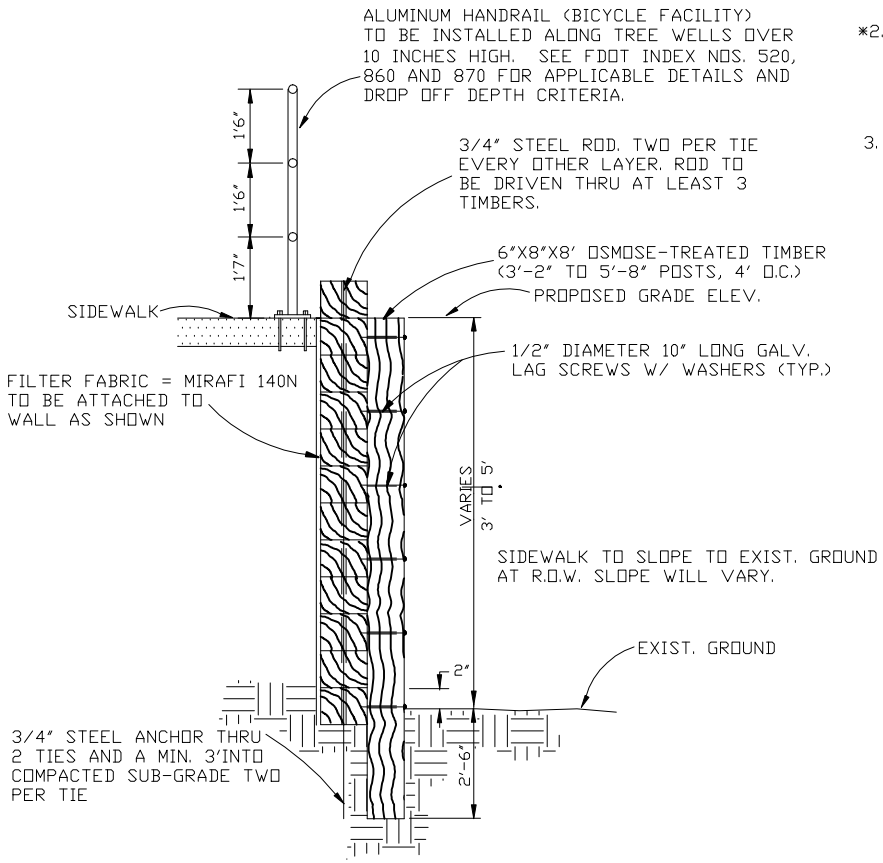

TREE WELL OR WALL DETAIL

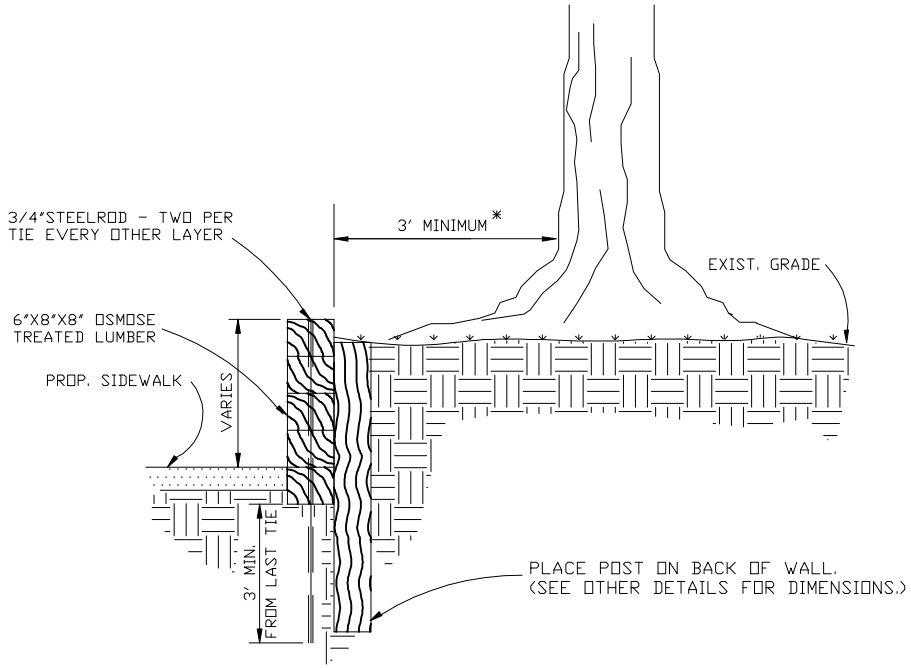

SPECIAL WALL DETAIL

REVISION DATE :	TRANSPORTATION TECHNICAL MANUAL	Hillsborough County Florida	TREE PROTECTION TYPICAL DETAILS	DRAWING NO. TD-16
				SHEET NO. 2 OF 6